
EcoFilter — water treatment right on site

We treat almost any water — the treatment train is designed from your water analysis. EcoFilter is the pre-treatment; where needed we add standard ultrafiltration, nanofiltration and reverse-osmosis stages.

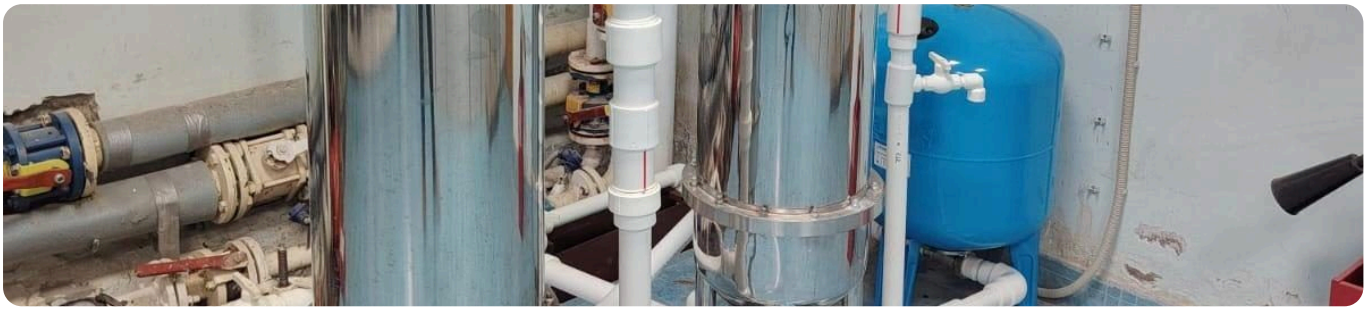

Ozone made on site

The oxidant is generated in the unit. The base configuration needs no continuous dosing of chlorine-containing reagents or coagulants.

Cavitation and microfiltration

Self-cleaning microfiltration: backwash during operation; backwash water is accounted for.

Digital log

Pressure, flow, backwash; sensor set matched to the site.

No shutdown

Bypass, drain, sampling and emergency stop — in the design.

Stages — matched to your task

EcoFilter
ozone, cavitation, self-cleaning microfiltration

Ultrafiltration
suspended solids, colloids, microorganisms

Nanofiltration
hardness, colour, organics

Reverse osmosis
dissolved salts — desalination

Lab report
before-and-after analysis, accredited laboratory

Membrane stages are standard commercial equipment. Stage selection, backwash water and concentrate are defined in the project.

Where we apply it

Wells and villages

Iron, manganese, turbidity, colour.

Before reverse osmosis

Pre-treatment ahead of membranes.

Plants and boiler houses

Water for your process.

Cities

Point-of-use polishing, chlorine before and after.

Ecological Technologies LLC (ECOTECH LLC) · TIN 5032370758 · PSRN 1235000143278

+7 916 278-87-84 · info@ecotechnew.ru · ecotechnew.ru/global/en

Before and after: accredited laboratory reports

Well water · 18.06.2026 MEASURED

PARAMETER	BEFORE	AFTER	UNIT
Total iron	0.92	0.05	mg/L
Turbidity	9.7	< 1.0	FTU
Colour	12	3	deg.

Reports Пц-3012-1/26, Пц-3012-2/26 · Water Quality Analytical Centre (accreditation AAC.A.00109). After treatment — compliant with SanPiN 1.2.3685-21 for the parameters tested.

Surface water · 11.06.2025 MEASURED

PARAMETER	BEFORE	AFTER	UNIT
Total iron	6.0	0.26	mg/L
Turbidity	90	2.5	FTU
Manganese	0.110	0.052	mg/L

Reports Пц-3372-1/25, Пц-3372-2/25 · Water Quality Analytical Centre.

Domestic wastewater · 27.08.2025 MEASURED

PARAMETER	BEFORE	AFTER	UNIT
BOD_5	74	2.8	mg/L
COD	169	6.2	mgO/L
Suspended solids	52	4.0	mg/L
Total phosphorus	24.4	0.85	mg/L
Total nitrogen	> 100	21.2	mg/L
Petroleum products	7.6	0.20	mg/L

Reports No. 5094, No. 5095 · Lab24 LLC, accreditation RA.RU.21AH50. Limits — for discharge to municipal sewers (RF Government Decree No. 644).

How we work

Task
water analysis

Survey
connection and measurement points

Programme
parameters, laboratory, timeline

Trial
8–12 weeks, sample series

Decision
scale up after lab reports

Documents

- EAEU Declaration of Conformity N RU Д-RU.PA06.B.32770/25 (TR CU 010/2011), valid until 23.07.2030
- Technical Specification ТУ 28.29.12-001-70473237-2025
- Technology Readiness Level (TRL) 7 — company assessment

Send your water analysis — we'll pick the treatment train

No analysis yet? Describe the source and the task. Every proposal is tailored to your site.

Version 1.0 · 13.10.2026. Results apply to the samples tested; the configuration is selected from the raw-water analysis of each specific site.